


WALL HEATER


DAW
SERIES

PIC-A-WATT FAMILY - DIAL-A-WATT
FAN FORCED - RV/MARINE



FEATURES:

- Pic-A-Watt® Element
 - C-Frame Motor
 - Squirrel Cage Blower
 - Quiet Running
- Dial-A-Watt Switch
 - Multiple Wattage Selection
 - 20 Gauge Powder Coated Grill with contemporary die formed round corners.
 - Standard Color - Bright White
 - Green Pilot Light indicates when heat is on.
 - Bimetallic limit turns the element off when an over temperature condition occurs and automatically
- resets when the normal temperature returns or is manually reset by thermostat.
- 1-Pole or 2-Pole unit mount thermostat 45°-80°F
 - Optional Surface Wall Box
 - Available in Stainless Steel Refer to Index



Shown with Optional PT-1
Thermostat Kit Installed

A heavy duty industrial switch mounted on the grill allows easy choice of 7 different heat settings with ease. Use where higher wattage is not required during unoccupied periods and freeze protection may be achieved with energy savings. Quiet operating tangential blower and commercial grade element make the Dial-A-Watt the heater of choice for people on the

booths, motor home/RV, pleasure craft, and cabins. By providing air movement and dry heat, must and mold odors are reduced and interior fabric life is maximized.

During use, the heater load (Amperage) can be adjusted to the receptacle or cord size that is feeding the RV. This prevents damage to plugs and receptacles due to over loading. During lay-up periods, wattage can be adjusted to the correct level.

Typical installations are toll

ENGINEERING SPECIFICATIONS:

Contractor shall supply and install, DAW-series wall-mounted forced-air electric heaters, manufactured by King Electrical Mfg. Company, of the wattage and voltage as indicated on the plans.

Ratings: Heaters shall be available in wattages of 250 to 2,250 at 120, 208, 240, or 277 volts.

Blower and Motor: A tangential cylindrical blower, delivering 65 CFM, shall be driven by a shaded pole, permanently lubricated, C-frame type motor with impedance protection and sealed bearings. Motors shall be the same voltage as the heater.

Elements: Elements assemblies shall be non-glowing design. Element assemblies shall consist of three steel sheathed heating tubes in a furnace brazed, plate finned, block design. Each sheathed tube shall contain coiled Ni-Chrome wire, embedded in an insulator of magnesium oxide. The element assembly shall provide a minimum of seven (7) possible wattage configurations available for selection during field installation. The use of external resistors, diodes, or other weak links to obtain multiple wattages will not be acceptable.

Thermal Overload: Heaters shall be equipped with thermal overload protection, which disconnects elements in the event normal operating temperatures are exceeded. The thermal overload protection device shall automatically reset when normal operating temperatures are reached or manually reset by the thermostat.

Wall Can: The wall can shall be 20 gauge electro-galvanized steel and shall contain a minimum of three (3) knockouts through which power leads are brought. The wall can shall have a depth gauge indicator, and a factory installed, insulated and stranded copper grounding wire. Minimum Clearance to Floors and Sidewalls. Zero clearance to combustibles.


Grill: The grill shall be louvered, one piece design with rounded edges on all four sides, with rounded corners to prevent snags from contact with other materials. The grill shall be epoxy powder coated in the color specified on the plans.

Approval: Heaters shall be listed and approved by Underwriters' Laboratories or equal.

Selector Switch: Shall provide 7 wattage settings adjustable from switch on front of heater.

Indicator: Light designates heater is operating.

MODEL CODE:




Standard Color: Bright White

SELECTION:

WATTAGE	120V		208V		240V		WEIGHT (lbs)
	MODEL	UPC #093319 PART NO.	MODEL	UPC #093319 PART NO.	MODEL	UPC #093319 PART NO.	
250-500-750-1000-1250-1500	DAW1215	19250					10
500-750-1000-1250-1500-1750-2250			DAW2022	19207	DAW2422	19254	
OPTIONS							
ADD PREFIX:	DESCRIPTION						
D-	For Decade Motor - Not Available with Inbuilt T-Stats due to Motor Size						11.5

DIMENSIONS

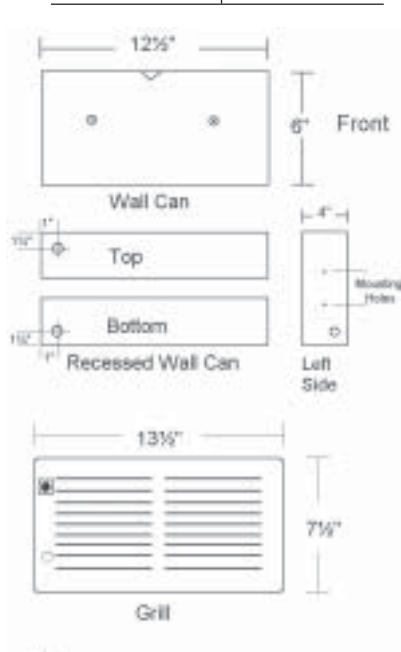

ACCESSORIES:

MODEL	DESCRIPTION	UPC #093319 PART NO.	WEIGHT
PAWS	Pic-A-Watt Surface Can - White	16305	4
PT-1	Stat Kit SPST	16306	.5
PT-2	Stat Kit DPST	16307	.5




PAWS - White Surface Can

Typical Shore Power Loads:

ITEM	AMPS
Battery Charger	7
Inverter	10/25
Hot Water Tank	12.5
Hair Dryer	14
Microwave	8
Portable Heater	12.5
Stove/Range Top	20
Coffee/Esspresso	6/8
Toaster	11.6
Hot Air Popper	10
Dial-A-Watt	2 to 12.5



Dial-A-Watt Heater Switch

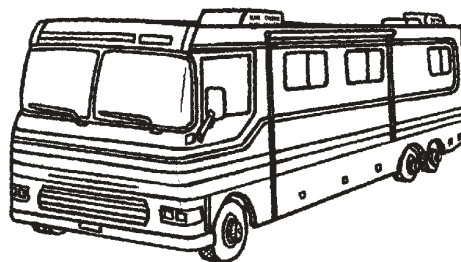

Great for use in RV's and Motor Homes!