


# STAINLESS STEEL

**MKT**  
SERIES

KICKSPACE  
CORROSION RESISTANT



## FEATURES:

- 304 Stainless Steel
- Dual Open Coil Element
- C-Frame Motor
- Squirrel Cage Blower

Approved for direct contact with building insulation.

- Optional 1-Pole or 2-Pole unit mount thermostat 45°-80°F operating range.

- Low Profile
- Dual Wattage
- Stainless Steel Grill
- Overlap Grill
- Safety limit turns off power to the element if it overheats and automatically resets.
- All fasteners and hardware are stainless steel.

## SELECTION:

WATTAGE	120V		208V 240V		WEIGHT (lbs)
	MODEL	UPC #093319 PART NO.	MODEL	UPC #093319 PART NO.	
1000 or 500	MKT1210-SS	11007			8
1200 or 600	MKT1212-SS	11013			
1500 or 750	MKT1215-SS	11014			
1000 or 500 750 or 375			MKT2410-SS	11001	
1200 or 600 900 or 450			MKT2412-SS	11005	
1500 or 750 1125 or 562			MKT2415-SS	11008	

## ENGINEERING SPECIFICATIONS:

Contractor shall supply and install, MKT-Series limited space mounted forced-air electric heaters, manufactured by King Electrical Mfg. Company. Heaters shall be of the wattage and voltage as indicated on the plans.

**Motor:** Thermally protected, and permanently lubricated.

**Fan:** Tangential (Squirrel cage) blower provides whisper quiet operation 70 CFM.

**Element:** Dual wattage element allows for field adjustment. Made from Ni-Chrome alloy open coil wire wrapped around a mica insulator.


**Thermal Cutout:** Safety limit turns off power to the element if it overheats and automatically resets.

**Safety Light:** Illuminates when the thermal cutout trips and turns off when the limit resets.

**Wall Box:** 20 gauge type 304 brushed stainless steel. All fasteners and hardware are stainless steel. Minimum Clearance to Floors and Sidewalls. Zero clearance to combustibles.

**Grill:** 20 Gauge, 304 Stainless Steel, clear epoxy finish.

**Options:** 1-Pole or 2-Pole unit mount thermostat 45-80° operating range, and overlap grill.

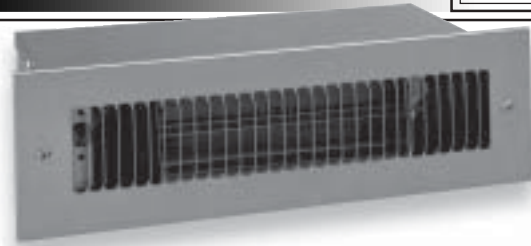

The Kick Space Heater is low profile in design and fits where standard heaters cannot. With the stainless construction, its' ideal use is where corrosion resistance is needed. Typical applications are marine vessels and other high humidity areas.

A typical marine vessel application is mounting through a bulkhead or plywood cabinet. The oversize grill (shown in photo) is standard on this kick space heater. For undercounter applications, check the accessories table for the appropriate grill.

## MODEL CODE:

MKT1210-SS  
 MKT Series  
 120 Volts  
 1000 Watts  
 SS Stainless Steel

## ACCESSORIES:

MODEL	DESCRIPTION	UPC #093319 PART NO.	WT.
KTG-SS	SS KT Grill No Overlap	12269	1
MKT-1-SS	Stat Kit SPST	11010	.6
MKT-2-SS	Stat Kit DPST	11011	.6

## DIMENSIONS

